
## Segment 1, 2

| | |
|---|---|
| **Panel count** | 6 |
| **Total power** | 3.000 kWp |
| **Orientation** | Portrait |
| **Rail system** | Horizontal |



This assembly plan is applicable for the highlighted segments

### Assembly plan

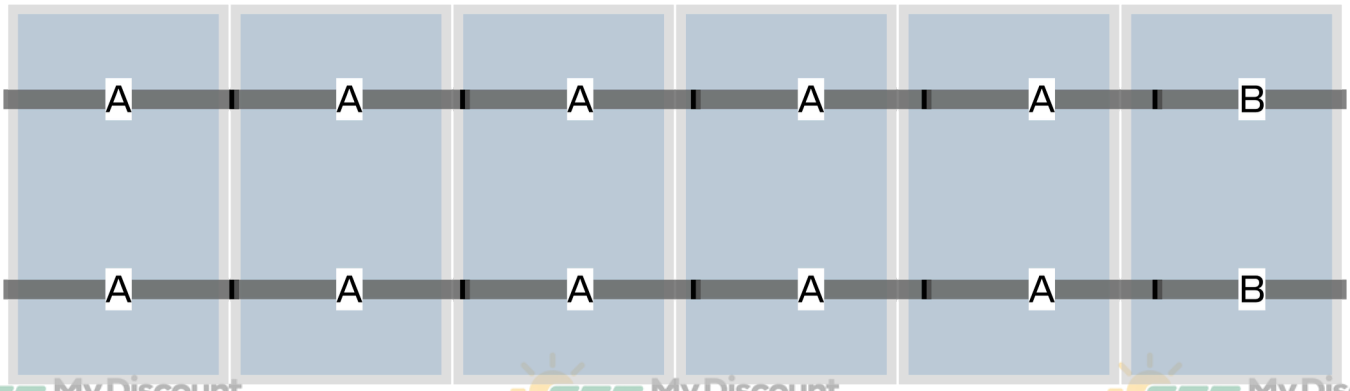



### Rail pieces

| Symbol | Rail | 1,188 | Amount | Saw length |
|---|---|---|---|---|
| A | mm | 1,188 | 10 | 1,188 mm |
| B | mm | | 2 | 974 mm |

* The indicated cutting lengths are merely an example of a possible configuration. The installer is free to determine the rail lengths or combination of rails as desired, as long as they follow the installation guide lines.

## Fixation plan

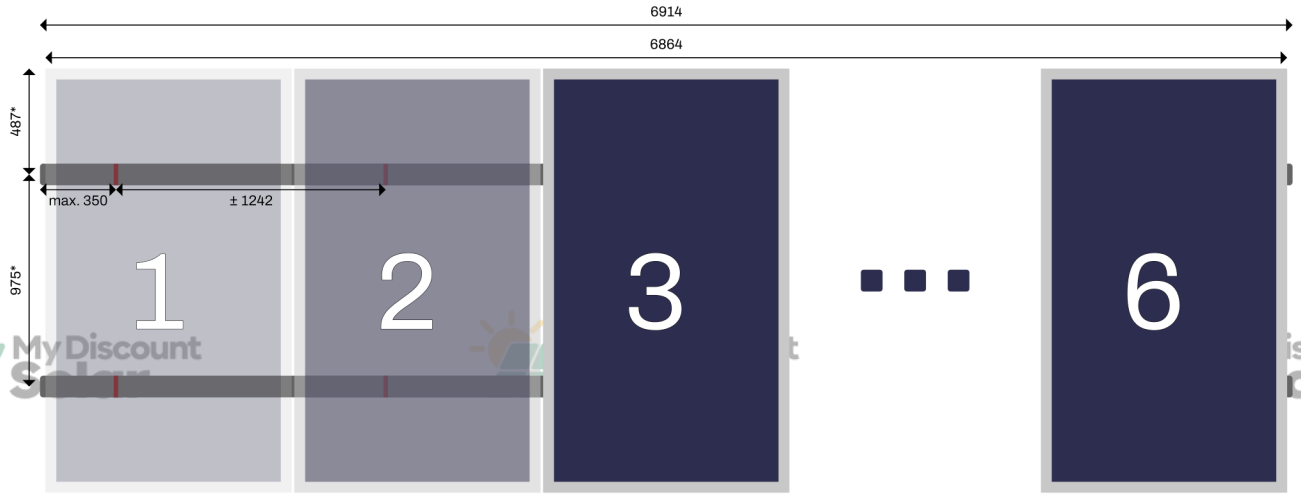


Units are in mm

* When needed, rail spacing can be extended to the previous or next tile, crest or seam, up to 400mm beyond the recommended distance.
Enstall recommends to always respect the module manufacturers rail spacing and clamping specifications.

## Materials

| Article number | Description | Amount |
|---|---|---|
| 1008020 1008040 | ClickFit EVO module clamp universal grey | 14 |
| 1008060 1008061 | ClickFit EVO roof hook universal | 12 |
| 1008131 | ClickFit EVO mounting rail end cap grey | 4 |
| | ClickFit EVO mounting rail coupler | 10 |
| | ClickFit EVO mounting rail 1188mm | 12 |